


### 500 Series for flows to 40 GPM (150 LPM)



Motor HP	Volts/Phase	"A"	"M"	"P"
1/4	115-208/230, 1 ph	16-3/16" (411mm)	7-5/8" (194mm)	2-1/8" (54mm)
1/3	115-208/230, 1 ph	16-3/16" (411mm)	7-5/8" (194mm)	2-1/8" (54mm)
1/3	115-208/230, 1 ph	16-3/16" (411mm)	8-1/4" (209mm)	2-1/8" (54mm)
1/2	115-208/230, 1 ph	17-5/16" (440mm)	8-3/4" (194mm)	2-1/8" (54mm)
1/2	208-230/460, 3 ph	16-13/16" (427mm)	8-1/4" (209mm)	2-1/8" (54mm)
3/4	115-208/230, 1 ph	18-5/16" (465mm)	9-3/4" (247mm)	2-1/8" (54mm)
3/4	208-230/460, 3 ph	18-5/16" (465mm)	9-3/4" (247mm)	2-1/8" (54mm)

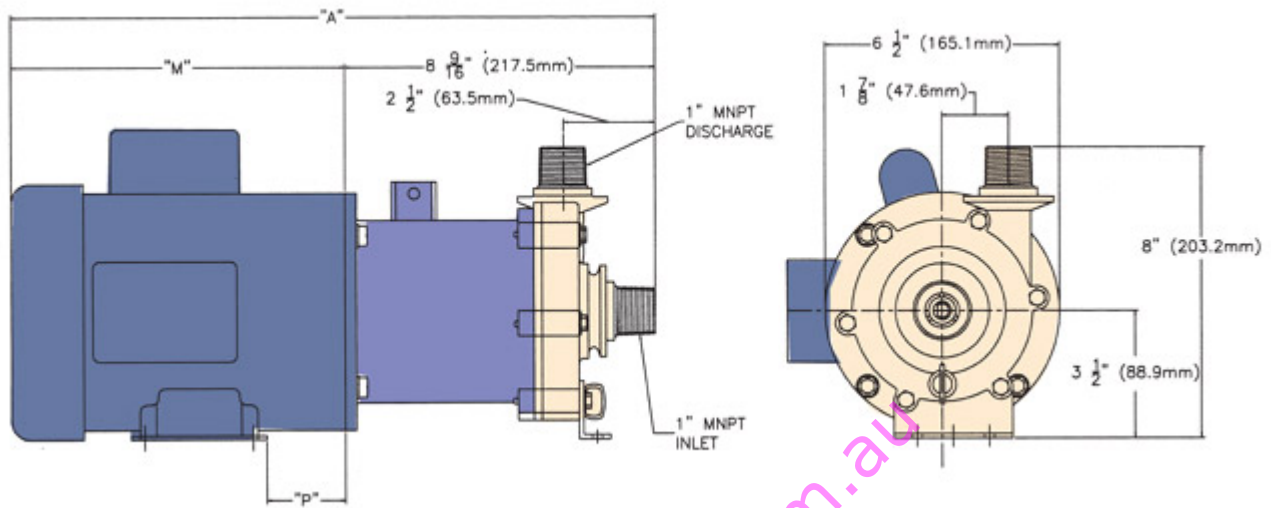