




# KOSHIN HIGH PERFORMANCE TRASH PUMPS



**KTH-50X**

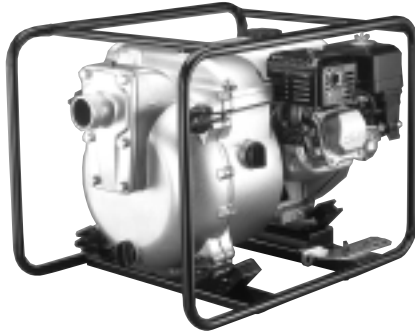

**KTH-80X**



**KTH-100X**


## Features

- The cleanout cover and volute can be easily removed in seconds for easy cleaning of debris.
- The seal is the heart of the pump. Silicon Carbide seals, developed exclusively for Koshin, vastly increase the durability of the mechanical seal and protect engine shaft.
- Impeller is Hi-chrome cast iron. Volute manufactured from Spheroidal Graphite cast iron. These materials employed to ensure long life and low maintenance. No wear-out plates.
- Sturdy steel wrap-around pipe frame protects entire unit.
- Rubber mountings minimize vibration.
- Honda OHV engine with oil alert, and electronic ignition provides reliability and low fuel consumption.
- All aluminum die cast pump housing for light weight and portability.

## Specifications

Model	KTH-50X	KTH-80X	KTH-100X	
<b>PUMP</b>	Connection Dia.	2"	3"	4"
	Connection Thread	NPT Male		
	Delivery Head	95 FT	89 FT	82 FT
	Delivery Volume	185 GPM	354 GPM	422 GPM
<b>ENGINE</b>	Type	Honda GX160	Honda GX240	HondaGX340
	Horse Power	5.5 HP	8.0 HP	11 HP
	Fuel	Gasoline		
	Fuel Tank Capacity	1.0 gal.	1.6 gal.	1.7 gal.
	Starting	Recoil Starter		
Net Weight	104 lbs.	128 lbs.	172 lbs.	

## Performance Curve

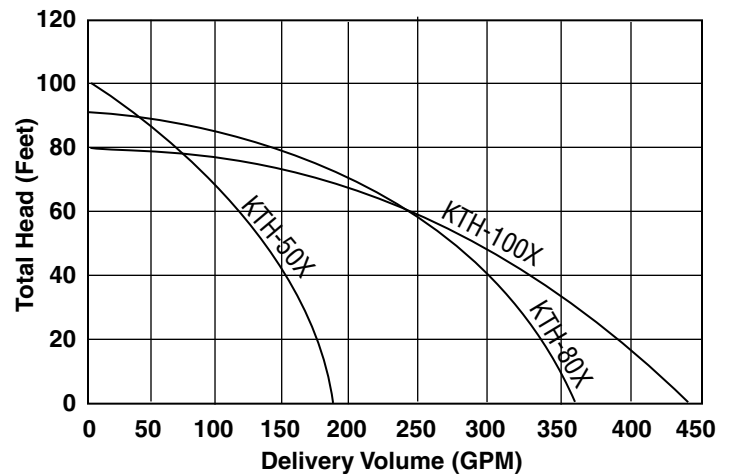

**KOSHIN AMERICA CORP.**

Distributed by:

Irrigation Warehouse Group Pty Ltd  
Ph 1300 661 417  
[www.pumpwarehouse.com.au](http://www.pumpwarehouse.com.au)